

RoHS

Features:

Available in 2 thru 24 circuits

Material: UL 94V-0 nylon

Standard color: Black

Specifications:

Current rating:

Wire size	AWG20	AWG22	AWG24	AWG26	AWG28	AWG30
Ampere	5A	5A	4A	3A	2A	1A



Voltage rating: 250V AC (RMS) or DC

Insulation resistance: 1000 m Ω min.

Dielectric strength: 1500V AC/minute

Temperature rise: 30°C max.

(carry rated current load)

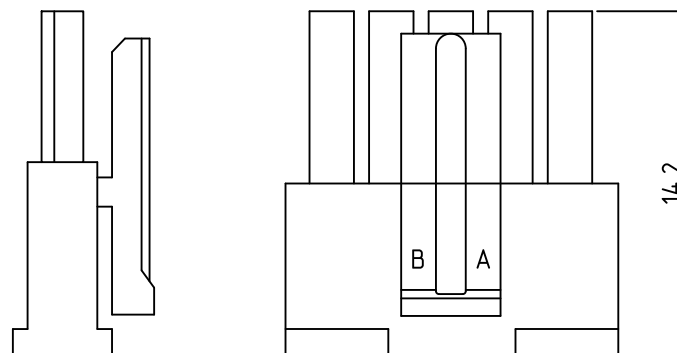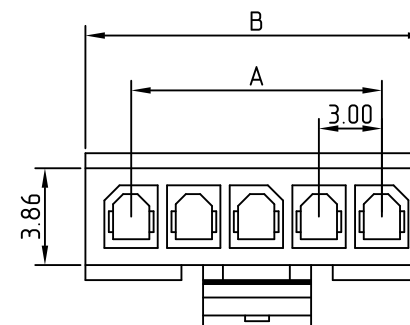

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	3.0	7.0	4	9	13	6	15	19
3	6.0	10.0	5	12	16	7	18	22

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
8	21	25	10	27	31	12	33	37
9	24	28	11	30	34			

HOW TO ORDER

S30002-RX-XX

1 2 3 4

1.Series No.:

S30002

3.Row Type:

1: Single Row

2: Dual Row

2.Product:

R: Receptacle
Housing

4.Contact No.:

02~12 (Single Row)

02~24 (Dual Row)

SATRON ELECTRONICS LTD.

APPROVED

CHECKED

DRAWN BY

UNIT

mm

SCALE

NOT

TOLARANCE

x. $\pm$ 0.5

.x $\pm$ 0.3

.xx $\pm$ 0.2

.xx $\pm$ 0.1

ITEM NUMBER

S30002-R1-XX

PART NAME

3.0mm Pitch Single Row
Receptacle Housing

REV

PAGE NO

1 / 1