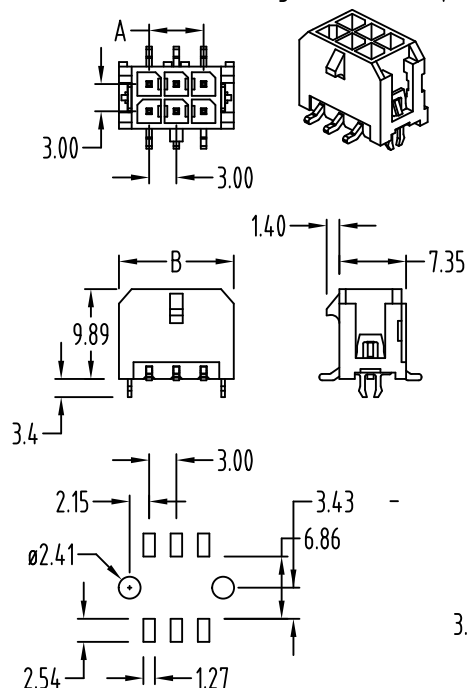
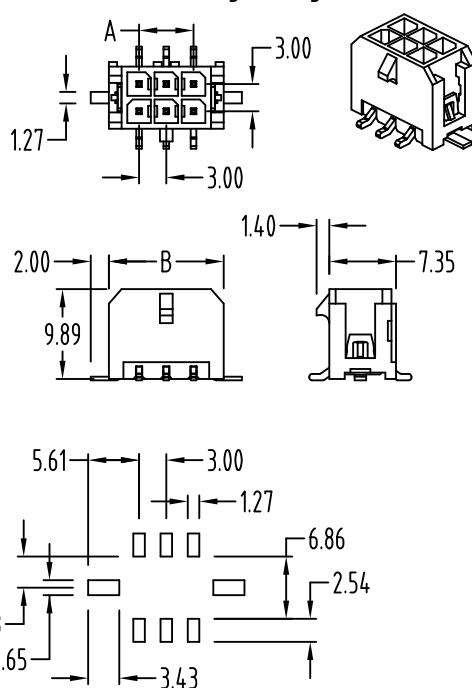


RoHS

S30002-HA2-XX-X
(With Soldering Retention Clipse)

PCB Layout: Component side

S30002-HC2-XX-X
(With Soldering Fitting Nail)

PCB Layout: Component side

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65
14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ +105°C

HOW TO ORDER
S30002-HX2-XX-X1. Series No.:
S300022. Product:
H: Header3. Function:
A: SMT Straight With
Soldering Retention Clip
C: SMT Straight With
Soldering Fitting Nail4. Row Type
1: Single Row
2: Dual Row5. Contact No.:
02-12 (Single Row)
02-24 (Dual Row)6. Plating:
T: Tin
G: Gold

SATRON ELECTRONICS LTD.

APPROVED

CHECKED

DRAWN BY

UNIT

TITLE

ITEM NUMBER

PART NAME

REV

mm

SCALE

NOT

X.±0.5
X.±0.3
XX±0.2
XX±0.1S30002-HA2-XX-X
S30002-HC2-XX-XPitch 3.0mm Header
SMT Dual Row
Straight

PAGE No

1 / 1